


SMF5.0(C)A THRU SMF200(C)A

200W Surface Mount Transient Voltage Suppressors

■ Features

- Low leakage current.
- Very fast response time.
- Excellent clamping capability.
- 200W peak pulse power capility with a 10/1000us waveform, repetitive rate(duty cycle):0.01%.
- Uni and bidirectional unit.
- Lead-free parts meet environmental standards of MIL-STD-19500 /228

■ Outline SOD-123FL

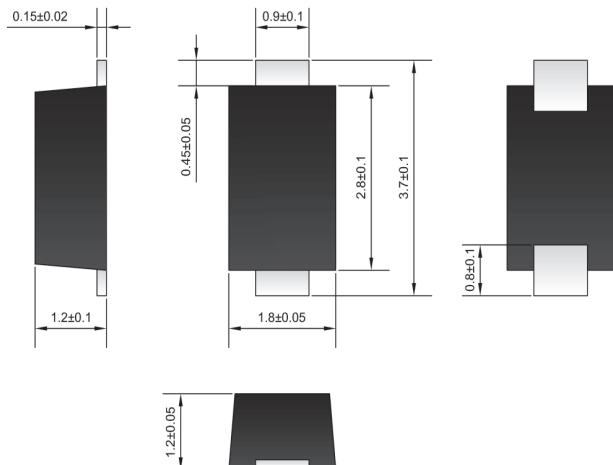


Dimensions in millimeters

■ Mechanical data

- Epoxy:UL94-V0 rated flame retardant
- Case : Molded plastic, SOD-123FL
- Terminals : Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity : Indicated by cathode band
- Weight : Approximated 0.010 gram

■ SOD-123FL foot print

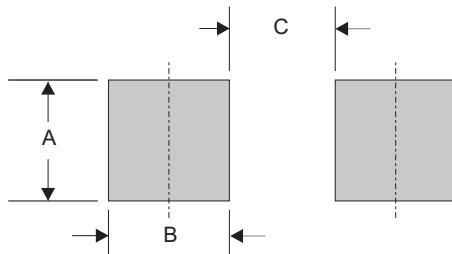

A	B	C
0.028 (0.70)	0.028 (0.70)	0.091 (2.30)

Dimensions in inches and (millimeters)

■ Maximum ratings and electrical characteristics

Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Conditions	Symbol	SMF Series	UNIT
Peak power dissipation	with a 10/1000 us waveform	P _{PP}	200	W
Peak power dissipation	with a 8/20 us waveform	P _{PP}	1000	W
Power dissipation on infinite heatsonk	at T _L =75°C	P _D	0.4	W
Peak pulse current	with a 10/1000 us waveform	I _{PP}	See next table	A
Peak forward surge current	8.3ms single half sine-wave superimposed on rate load (JEDEC methode)	I _{FSM}	20	A
Maximum instantaneous forward voltage	at 25A for unidirectional only	V _F	3.5	V
Operating and Storage temperature		T _J , T _{STG}	-55 ~ +150	°C

Note 1. Measured on 8.3 ms single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum

RATINGS AND CHARACTERISTIC CURV SMF5.0(C)A THRU SMF200(C)A

■ Electrical characteristics

table 1

Part No.	Reverse Stand-off Voltage	Breakdown Voltage		Test Current	Peak Forward Surge Current	Maximum Clamping Voltage @I _{PP}		Maximum Leakage Current	Marking Code	
	V _{RWM}	V _{BR Min}	V _{BR Max}			V _C	I _{PP}			
	Volts	Volts	Volts	mA	A	Volts	A	uA	UNI	BI
SMF5.0(C)A	5.0	6.40	7.00	10	20	9.2	21.7	400	FE	KE
SMF6.0(C)A	6.0	6.67	7.37	10	20	10.3	19.4	400	FG	KG
SMF6.5(C)A	6.5	7.22	7.98	10	20	11.2	17.9	250	FK	KK
SMF7.0(C)A	7.0	7.78	8.60	10	20	12.0	16.7	100	FM	KM
SMF7.5(C)A	7.5	8.33	9.21	1.0	20	12.9	15.5	50	FP	KP
SMF8.0(C)A	8.0	8.89	9.83	1.0	20	13.6	14.7	25	FR	KR
SMF8.5(C)A	8.5	9.44	10.4	1.0	20	14.4	13.9	10	FT	KT
SMF9.0(C)A	9.0	10.0	11.1	1.0	20	15.4	13.0	5	FV	KV
SMF10(C)A	10	11.1	12.3	1.0	20	17.0	11.8	2.5	FX	KX
SMF11(C)A	11	12.2	13.5	1.0	20	18.2	11.0	2.5	FZ	KZ
SMF12(C)A	12	13.3	14.7	1.0	20	19.9	10.1	2.5	HE	LE
SMF13(C)A	13	14.4	15.9	1.0	20	21.5	9.30	1	HG	LG
SMF14(C)A	14	15.6	17.2	1.0	20	23.2	8.62	1	HK	LK
SMF15(C)A	15	16.7	18.5	1.0	20	24.4	8.20	1	HM	LM
SMF16(C)A	16	17.8	19.7	1.0	20	26.0	7.69	1	HP	LP
SMF17(C)A	17	18.9	20.9	1.0	20	27.6	7.25	1	HR	LR
SMF18(C)A	18	20.0	22.1	1.0	20	29.2	6.85	1	HT	LT
SMF19(C)A	19	21.1	23.3	1.0	20	30.6	6.54	1	HB	LB
SMF20(C)A	20	22.2	24.5	1.0	20	32.4	6.17	1	HV	LV
SMF22(C)A	22	24.4	26.9	1.0	20	35.5	5.63	1	HX	LX
SMF24(C)A	24	26.7	29.5	1.0	20	38.9	5.14	1	HZ	LZ
SMF26(C)A	26	28.9	31.9	1.0	20	42.1	4.75	1	JE	ME
SMF28(C)A	28	31.1	34.4	1.0	20	45.4	4.41	1	JG	MG, YG
SMF30(C)A	30	33.3	36.8	1.0	20	48.4	4.13	1	JK	MK
SMF33(C)A	33	36.7	40.6	1.0	20	53.3	3.75	1	JM	MM
SMF36(C)A	36	40.0	44.2	1.0	20	58.1	3.44	1	JP	MP
SMF40(C)A	40	44.4	49.1	1.0	20	64.5	3.10	1	JR	MR
SMF43(C)A	43	47.8	52.8	1.0	20	69.4	2.88	1	JT	MT
SMF45(C)A	45	50.0	55.3	1.0	20	72.7	2.75	1	JV	MV
SMF48(C)A	48	53.3	58.9	1.0	20	77.4	2.58	1	JX	MX

RATINGS AND CHARACTERISTIC CURV SMF5.0(C)A THRU SMF200(C)A

■ Electrical characteristics

table 1

Part No.	Reverse Stand-off Voltage	Breakdown Voltage		Test Current	Peak Forward Surge Current	Maximum Clamping Voltage @I _{PP}		Maximum Leakage Current	Marking Code	
	V _{RWM}	V _{BR Min}	V _{BR Max}			V _C	I _{PP}			
	Volts	Volts	Volts	mA	A	Volts	A	uA	UNI	BI
SMF51(C)A	51	56.7	62.7	1.0	20	82.4	2.43	1	JZ	MZ
SMF54(C)A	54	60.0	66.3	1.0	20	87.1	2.30	1	XE	NE
SMF58(C)A	58	64.4	71.2	1.0	20	93.6	2.14	1	XG	NG
SMF60(C)A	60	66.7	73.7	1.0	20	96.8	2.07	1	XK	NK
SMF64(C)A	64	71.1	78.6	1.0	20	103.0	1.94	1	XM	NM
SMF70(C)A	70	77.8	86.0	1.0	20	113.0	1.77	1	XP	NP
SMF75(C)A	75	83.3	92.1	1.0	20	121.0	1.65	1	XR	NR
SMF78(C)A	78	86.7	95.8	1.0	20	126.0	1.59	1	XT	NT
SMF80(C)A	80.0	88.8	97.6	1.0	20	129.0	1.55	1	XB	NB
SMF85(C)A	85.0	94.4	104.0	1.0	20	137.0	1.46	1	XV	NV
SMF90(C)A	90.0	100.0	111.0	1.0	20	146.0	1.37	1	XX	NX
SMF100(C)A	100.0	111.0	123.0	1.0	20	162.0	1.23	1	XZ	NZ
SMF110(C)A	110.0	122.0	135.0	1.0	20	177.0	1.13	1	TE	PE
SMF120(C)A	120.0	133.0	147.0	1.0	20	193.0	1.04	1	TG	PG
SMF130(C)A	130.0	144.0	159.0	1.0	20	209.0	0.96	1	TK	PK
SMF140(C)A	140.0	155.0	171.0	1.0	20	224.0	0.89	1	TB	PB
SMF150(C)A	150	167.0	185.0	1.0	20	243.0	0.82	1	TM	PM
SMF160(C)A	160	178.0	197.0	1.0	20	259.0	0.77	1	TP	PP
SMF170(C)A	170	189.0	209.0	1.0	20	275.0	0.73	1	TR	PR
SMF180(C)A	180	200.0	220.0	1.0	20	292.0	0.69	1	TT	PT
SMF190(C)A	190	211.0	232.0	1.0	20	308.0	0.69	1	TV	PV
SMF200(C)A	200	224.0	247.0	1.0	20	324.0	0.62	1	TX	PX

Note : 1. Suffix 'C' denotes bi-directional devices. Suffix 'A' denotes 5% tolerance devices, no suffix denotes 10% tolerance devices.
 2. For bi-directional types having V_{RWM} of 10 volts and less, the I_R limit is doubled.

RATINGS AND CHARACTERISTIC CURV SMF5.0(C)A THRU SMF200(C)A

■ Rating and characteristic curves

