

FEATURES:

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Ideally suited for freewheeling diode power factor correction applications
- Excellent high temperature switching
- Optimized to reduce switching losses
- High temperature soldering guaranteed : 250°C / 10 second, 0.25"(6.35mm) from case

MECHANICAL DATA

Case : JEDEC ITO-220AB molded plastic

Terminals : Leads solderable per MIL-STD-750


Method 2026

Position : As marked

Mounting Position : Any

Mounting Torque : 5 in - lbs.max

Weight : 0.08 ounce, 2.24grams

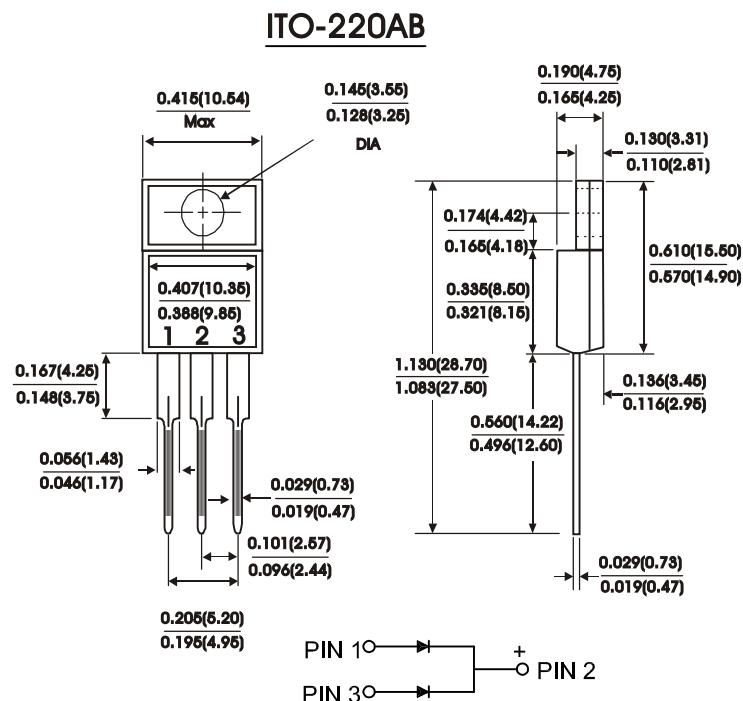

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristic	Symbol	UFF 10005CT	UFF 1001CT	UFF 1002CT	UFF 1003CT	UFF 1004CT	UFF 1006CT	UFF 1008CT	Units					
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	200	300	400	600	800	Volts					
Maximum RMS voltage	V _{RMS}	35	70	140	210	280	280	560	Volts					
Maximum DC blocking voltage	V _{DC}	50	100	200	300	400	600	800	Volts					
Maximum average forward rectified current at T _c =100°C	I _(AV)	10.0						Amps						
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(Per leg)	I _{FSM}	100						Amps						
Maximum instantaneous forward voltage (Per leg) IF=5.0A	V _F	1.0		1.30		1.70		Volts						
Maximum DC reverse current T _c =25 °C at rated DC blocking voltage (Per leg) T _c =125°C	I _R	10.0 500.0						µA						
Typical reverse recovery time (Per leg)(NOTE 1)	T _{RR}	50			100			nS						
Typical junction capacitance(Per leg)(NOTE 2)	C _J	50						P _F						
Operating temperature range	T _J	-55 to +150						°C						
Storage temperature range	T _{Stg}	-55 to +150						°C						

NOTES:

(1)Reverse Recovery Test CONDITION : I_F=0.5A, I_R=1.0A, I_{RR}=0.25A

(2)Measured at 1MHZ and reverse Voltage of 4.0V

(3)Marking : UFF10005CT = UFF10005 (Without Marking "CT")
Symbol Marking

RATINGS AND CHARACTERISTIC CURVES UFF10005CT THRU UFF1008CT

